

Heavy-Duty Fastening for Agriculture



High strength, fast and easy installation, along with unmatched vibration-resistance, are what make HuckBolts[®] the smart choice for heavy equipment assembly applications for agriculture.

High Clamp Allows Welding Replacement and Lighter Equipment

In many applications, HuckBolts have been proven superior to all other forms of assembly for speed and accuracy of installation, safety, environmental friendliness, and overall productivity.

HuckBolts can also contribute to lightweighting of equipment by allowing aluminum to be used instead of steel. While replacing steel with aluminum is an excellent strategy for lightweighting, the problems associated with welding aluminum have often precluded its use. However, the strong clamp performance of HuckBolts provides the joining power to attach aluminum elements without welding. Because Huck* fasteners offer higher clamp than conventional fasteners, fewer or smaller diameter Huck fasteners can be used, further reducing weight. And HuckBolts deliver shear and tensile strength exceeding that of conventional nut and bolt fasteners.

These engineered fasteners are installed using a unique direct-tension/swaged-on method, providing for a smooth, jolt-free installation. The potential for repetitive stress syndrome, often experienced with torque wrench installations, is virtually eliminated. In addition, as compared to welding, using Huck fasteners does not require highly trained installation personnel, and provides for fast, safe, and accurate assembly.

High-Performance in the Field

Whether operating in the field or accommodating heavy storage capacities, agricultural machinery really takes a beating. The vibration-resistant, high-strength features of HuckBolts are ideal for tractors, harvesters, and towed equipment such as grain carts, ploughs, planters, balers, tillers, and rotary cutters. Typical applications for Huck® fasteners are found in the chassis, cab frame, seats, maintenance access panels, and wheel nuts. Huck fasteners can also be utilized in both mobile and permanent storage structures like grain silos.




Huck® Fasteners For Agriculture

HuckBolts[®]

Huck 360⁶

The Huck 360[®] nut and bolt system is designed for applications where the joining performance of a HuckBolt® is required, but removability and/or standard tooling are also requirements. The only Huck fastener requiring torque for installation, this breakthrough system delivers 5 times the fatigue life of a standard threaded bolt. The Huck 360 can be installed and removed 300% faster than conventional locknuts, adding to the efficiency and productivity of a wide range of assembly operations.



10mm, 12mm, 14mm, 16mm, 20mm, 24mm, 36mm



BobTail[®]

Engineered to meet the challenges of a wide range of heavy equipment assembly applications, Huck® BobTail® offers high performance, vibration resistance, and reliability in a unique, pintail-less design.

Available Sizes: 3/16", 1/4", 5/16", 3/8", 1/2", 5/8", 3/4", 7/8", 1",

12mm, 14mm, 16mm, 20mm

Materials: Steel, Aluminum, Stainless Steel Headstyles: Round, Truss, 90° Flush, Flanged, 98T

U-Spin⁶

U-Spin® HuckBolts help speed up production with a simple, virtually foolproof installation process that's fast and precise. In fact, U-Spin can be installed in 45-60 seconds – roughly half the time it takes to install conventional U-bolts.

Available Sizes: Sized to customer requirements

Materials: Steel

Advanced Huck Tooling

Huck offers a full line of advanced, pneudraulic and heavy-duty hydraulic installation tools and nose assemblies that work with each engineered fastener. Supporting Huck hydraulic tooling is Huck's line of Powerig® power units.











U-Spin®

Manifold

Huck® Structural Blind Fasteners

BOM[®]

The Huck BOM® (Blind, Oversized Mechanically locked) fastener is so strong, one can do the work of up to four conventional fasteners. Its unique push-and-pull installation design makes it ideal for heavy equipment assembly use.

Available Sizes: 3/16", 1/4", 5/16", 3/8", 1/2", 5/8", 3/4"

Materials: Steel, Stainless Steel

Other Structural Blind Fasteners

When only one side of the joint material is accessible, performance-engineered Huck structural blind fasteners are the smart choice. Each Huck blind fastener offers unique features that make it ideal for certain applications. Offering the industry's best range of shear and tensile strength, Huck structural blind fasteners include HuckLok[®], Magna-Bulb[®], and Auto-Bulb[™].

Available Sizes: 3/16" – 1/2" Materials: Steel, Aluminum, Stainless Steel Headstyles: Protruding, Truss, 100° Flush, 100° Oval Countersunk, Countersunk

*Not applicable to all Huck structural blind fasteners





Related Arconic Fastening Systems and Rings Products

KEYSERT® Solid Inserts

Keysert* solid, one-piece, key-locking inserts are used to repair damaged threads or for use in original equipment. The Keysert* locking keys provide a positive mechanical lock, which prevents rotation due to vibration or torsion. Keyserts are available in carbon or stainless steel, with internal thread diameters ranging from #6 through 1-1/2" and external diameters ranging from 5/16" to 1-7/8".

Recoil® Threaded Inserts

Recoil* threaded inserts deliver positive locking performance and long thread life. Made from 304 Stainless Steel as a standard, Recoil inserts are also available in a wider range of materials including Inconel, 316 Stainless Steel, and Phosphor Bronze. Recoil sizes range from #2 through 1-1/2" (inch series) and M2 through M39 (metric series).

Marson[™] Blind Rivets

Proven in a wide range of assembly applications, Marson[™] blind rivets are available in Buttonhead, Large Flange, and Countersunk headstyles in a wide range of materials and sizes ranging from 3/32" to 1/4".

Marson™ Rivet Nuts

Marson" offers a wide selection of rivet nuts that provide permanent thread placement in thin materials while reducing the surface damage that can occur with other fastening methods. These rivet nuts are available in a wide variety of styles, with grip ranges from 0.020" to 0.500".










Huck® Fastening Technology

Vibration Resistance: How Huck® Does It.


Huck® engineering. It's what makes a HuckBolt a HuckBolt. And, it's what gives each C50L® BobTail,® and Huck 360® its strength and vibration-resistant properties – the highest level of vibration resistance you'll find in the industry.


Eliminating the Gap.

In conventional nut and bolt installations, gaps between nut and bolt threads are a source of potential loosening. The HuckBolt design practically eliminates these gaps, by featuring full metal-to-metal contact between the swaged-on collar and the pin. This unique swaged connection provides unwavering vibration resistance, even in the most vibration-intensive environments.

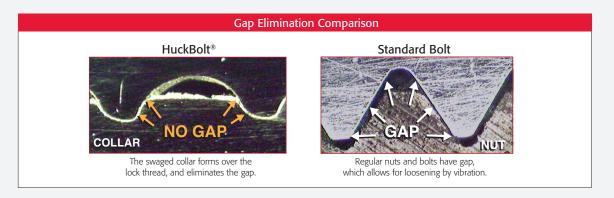

When compared with conventional nuts and bolts, HuckBolts have a much larger cross-sectional area and larger root radius, resulting in a much stronger and more secure joint. In fact, HuckBolts have up to 30% more bolt cross-sectional area, and up to 5x larger root radius than regular bolts, depending on the bolts used.





Huck® vs. Conventional Joining

As compared with conventional torqued-on nuts and bolts and when contrasted with welding, Huck fasteners offer consistent clamp that is designed into the fastener itself – clamp integrity is not dependent on the tool or the operator.

Huck fasteners offer a combination of a reliable, vibration-resistant joint, and a safe, efficient installation process. Even in the most vibration-intensive applications, Huck fasteners are proven to never come loose, and maintain strength and structural integrity for the life of the joint.

Huck® vs. Torque Clamp: The True Measure of Joint Integrity.

Torque has long been the standard by which tightness of a joint was measured. However, clamp has been proven to be the true indicator of whether or not a joint exhibits high strength and long life. Only HuckBolts, which use the direct tension/swaging method of installation, deliver that consistent clamp. To prove it, Huck engineers tested conventional nuts and bolts and established that even when torque is consistent, clamp isn't. The result of that testing is found below.

(8)	
12	
9	刀
Ť	
ヹ	
В	而

5/8" GRADE 8 FASTENER	CLAMP LBF TEST 1	CLAMP LBF TEST 2	CLAMP LBF TEST 3	CLAMP LBF TEST 4	% VARIATION
Free Running Nut	15,000	20,000	21,000	18,000	40%
Nylon Lock Nut	21,500	18,000	18,000	24,000	33%
Stoverized Lock Nut	26,000	21,000	28,500	23,000	36%

^{*}Results based on 5/8" diameter bolt.

Because HuckBolts are not subjected to torsion during installation, they can safely be taken to higher preload values than conventional bolts. This installation requires direct tension only, while conventional bolts are under a combination of tension and torsion during installation.

Conventional bolts develop torsional forces from friction and geometric factors between the mating threads, resulting in a reduction of yield and tensile strength of 10% to 20%.

See for yourself. Watch the video at AFSRHuck.net/Clamp

Huck Vs. Welding HuckBolts Change The Equation.

While welding has long been utilized to deliver a secure joint, there are several strong reasons to consider a proven alternative — direct-tension, swaged-on HuckBolts. Fastening with vibration-resistant HuckBolts instead of welding offers five key benefits over welding: safety, simplicity, speed, cost-savings, and structural integrity. Utilized over more than 60 years in the harsh trucking and rail industry environments, Huck fasteners have proven they perform.

For more information, visit AFSRHuck.net/NoWeld





Arconic Fastening Systems and Rings











Arconic Inc. (NYSE: ARNC) creates breakthrough products that shape industries, providing solutions to complex engineering challenges to transform the way we fly, drive, build, and power. Combining ingenuity and advanced manufacturing, we deliver products that meet the challenges and demands faced by our customers.

Arconic Fastening Systems and Rings, formerly Alcoa Fastening Systems & Rings, is a global leader in fastening technology. Offering the greatest breadth and depth of fastening system solutions in the industry, Arconic continues to reflect the same commitment to product quality and support that customers have come to expect. To serve its growing market, Arconic Fastening Systems and Rings maintains corporate offices worldwide. In addition, Arconic distributors are located in many key industrial centers throughout the world, providing a ready supply of fasteners, installation tools, tool parts, and application assistance.

Americas

Waco Operations 8001 Imperial Drive Waco, TX 76712, USA P.O. Box 8117 Waco, TX 76714-8117, USA Tel: 800 388 4825 Fax: 800 798 4825

Kingston Operations 1 Corporate Drive Kingston, NY 12401, USA Tel: 800 278 4825 Fax: 845 334 7333

Tracy Operations 1925 North MacArthur Drive Tracy, CA 95376, USA Tel: 800 826 2884 Fax: 800 573 2645

Carmel Operations 14300 Clay Terrace Blvd. Suite 250 Carmel, IN 46032, USA Tel: 800 826 2884

Fax: 800 573 2645

Tacubaya Operations Avenida Parque Lira 79-402 Tacubaya Mexico C P 11850 Tel: +52 55 5515 1776 Fax: +52 55 5277 7564

São Paulo Operations Av. Nações Unidas, 12.901 Torre Oeste, 3° andar São Paulo - SP - Brasil 04578-000 Tel: 0800 015 9888 Fax: +55 11 5509 0200

International Locations

Kolkata Operations Unit no. 28, Chowringhee Court 55/1, Chowringhee Road Kolkata – 700071

Tel: +91 33 4069 9170/80 Fax: +91 33 4069 9184

Tokyo Operations Arconic Japan Ltd. #1013 NBF Hibiya Bldg. Uchisaiwai-cho, Chiyoda-ku Tokyo 100-1011 Japan Tel: +81 3 3539 6577

Fax: +81 3 3539 6585

Melbourne Operations 1508 Centre Road Clayton, Victoria, 3168 Australia

Tel: +61 3 8545 3333 Fax: +61 3 8545 3390

Suzhou Fasteners Operations 58 Yinsheng Road, Shengpu Suzhou Industrial Park Suzhou Jiangsu 215126

Tel: 0512 62863800-8888 Fax: 0512 62863810

Telford Operations Unit C, Stafford Park 7 Telford, Shropshire TF3, 3BQ United Kingdom Tel: +44 1952 2900 11 Fax: +44 1952 2904 59

St. Cosme Operations 9 rue de Cressonnieres 72110 Saint Cosme en Varais France

Tel: +33 0 2.43.31.41.00 Fax: +33 0 2.43.31.41.41

Kelkheim Operations Industriestr. 6 65779 Kelkheim Germany

Tel: +49 [0] 6195 8050 Fax: +49 [0] 6195 2001





ACE RIVET & FASTENER INC.

P: 905-792-2255 E: SALES@ACERIVET.COM W: WWW.SALES@ACERIVET.COM

AFSRHuck.net YouTube.com/AFSIndustrial

The information contained in this publication is only for general guidance, and is not intended to create any warranty, express, implied, or statutory; all warranties are contained only in AFSR's written quotations, acknowledgments, and/or purchase orders. It is recommended that the user secure specific, up-to-date data and information regarding each application and/or use of such products.

